


Lighting Performance Profile

STACK
ABL

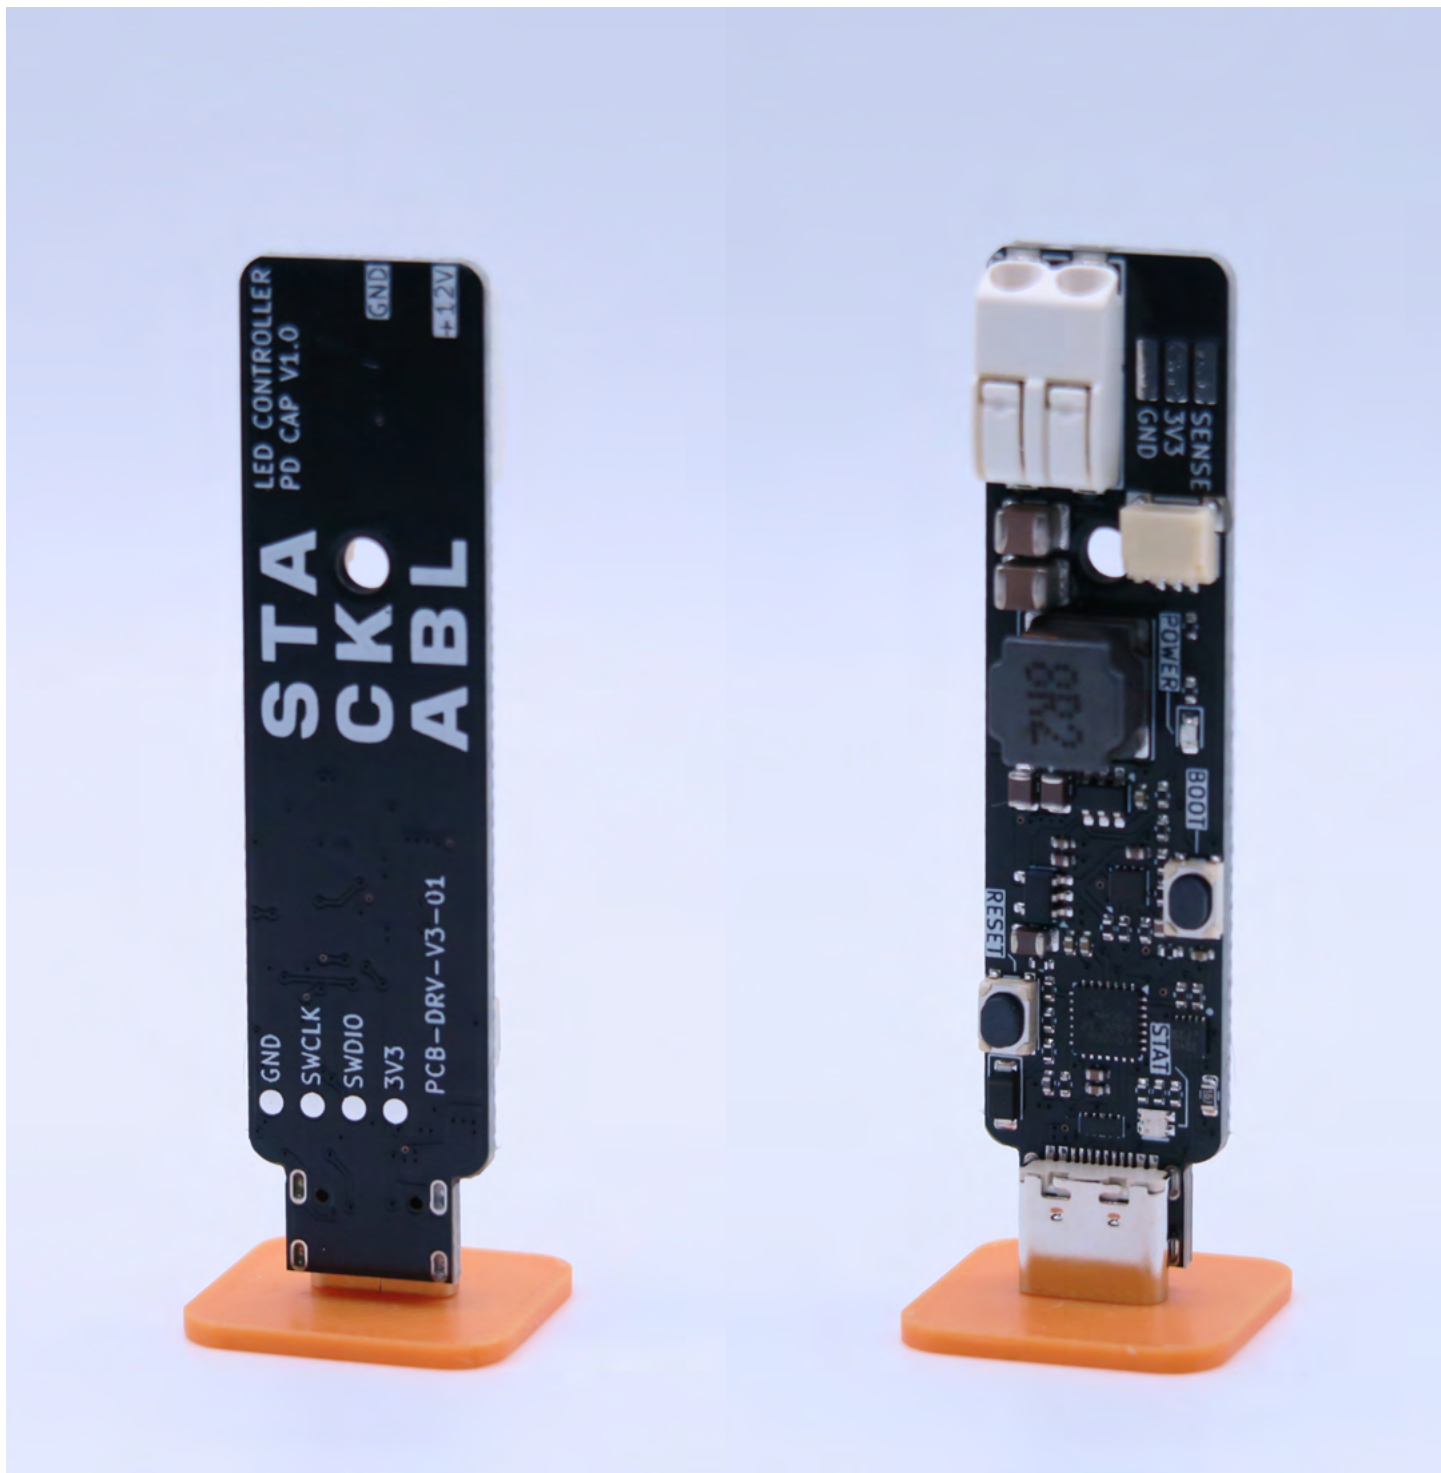

Proprietary PCB Hardware
Photo © Stackabl

Lighting Performance Profile

STACK
ABL

CERTIFICATION

ETL certified (UL equivalency)
Dry indoor use only

POWER

Power supply:

LAMPS

- “Cellphone-style” plug-in driver (provided), fabric-wrapped USB-C wire

PENDANTS

- 12 VDC output Class 2 constant voltage integral power supply
- Integral power supply in Standard Canopy can support up to 10 light discs
- Integral power supply in Multi-fixture Canopy can support up to 25 light discs
- Remote drive options upon request
- Casambi, DALI, Lutron Compatible

Controls:

LAMPS

- Touch on/off/dim

PENDANTS

- 120/227 V input, TRIAC, ELV, 0-10 dimming

Input voltage:

LAMPS

- USB-C PPS 12 VDC

PENDANTS

- 120 VAC (277 VAC upon request)

Lamping:

3.7 W per 5” light disc / 7.4 W per 8” light disc, CRI 90, L80 50,000 hours

Lumens delivered:

350 lm per 5” light disc / 585 lm per 8” light disc

Light disc temp:

2200 K / 2700 K / 3000 K / 3500 K

ACOUSTICS

Felt NRC: 0.2
PET NRC: 0.3

ASSEMBLED IN TORONTO, CANADA